

- MIL-I-DTL-23053/5
- Excellent High Frequency EMI Shielding
- Easily Installs Over Connectors And Splices
- Flame Retardant UL224

Put-Ups

Nominal Size	Part #	Unshrunk Diameter /mm	Shrunk Diameter /mm	Wall Thickness AFTER	Bulk Box Put Up/ 1,2mPcs.	ShopBox Put Up/ 1,2mPcs.	Available Colors	Kgs/ 10Pcs.
9,0mm	H3C0.38BK	9,0	3,0	0.031"	12	2	Black	-
12,0mm	H3C0.50BK	12,0	4,0	0.033"	12	2	Black	-
18,0mm	H3C0.75BK	18,0	6,0	0.039"	12	2	Black	-
24,0mm	H3C1.00BK	24,0	8,0	0.048"	12	2	Black	-
40,0mm	H3C1.50BK	40,0	13,0	0.050"	12	2	Black	-
50,0mm	H3C2.00BK	50,0	17,0	0.059"	12	2	Black	-



Cut Cleanly
Scissor

Material
Polyolefin



Grade
H3C

Shield 3:1 Heatshrink Tubing Shrinks To 1/3 its original diameter!

3:1 Shielding heatshrink tubing is a unique combination of Polyolefin and conductive cloth, with a high frequency EMI shielding properties.

This product, a flame retardant and fluid resistant tubing, is a perfect solution for protecting your wire & cable bundles.

Colors Available:
Black (BK)

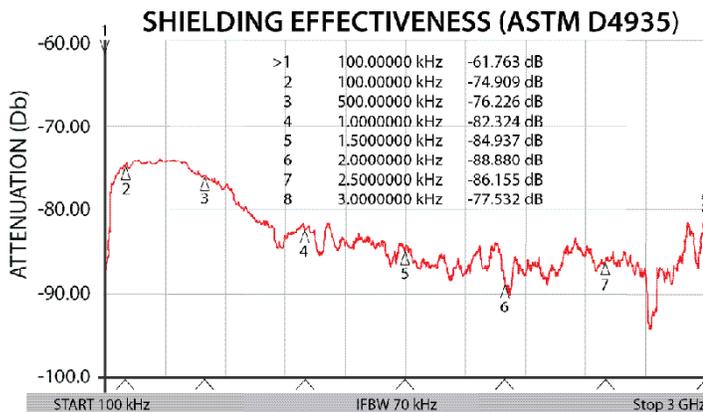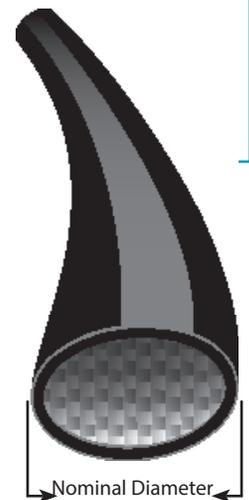



FLAMMABILITY

Flammability Rating _____ Flame Retardant UL224

CHEMICAL RESISTANCE


Fluid Resistance _____ Excellent

Shrinks
194°F (90°C)

Melt Point
ASTM D-2117
392°F (200°C)

Maximum Continuous
Mil-I-23053
275°F (135°C)

Minimum Continuous
-67°F (-55°C)

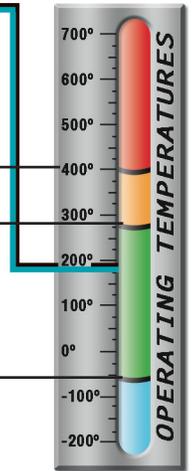

www.cableOrganizer.fr



Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.

PHYSICAL PROPERTIES

Recommended Cutting _____ Scissors
Colors _____ 1
Flexibility _____ Medium
Break Strength _____ 1,500
After Shrinkage
Dielectric Strength (volts/mil) _____ 500
Wall Thickness _____ .031-.059
After Shrinkage