



- EMI, RFI, ESD Protection
- Grounding Straps
- Engine Dress-Up
- Complies With
CID A-A-59569
- Extreme Blowout
Protection
- Expands For Easy
Installation
- Cut And Abrasion
Resistant



Cut Cleanly
Scissors

Material

Tinned Copper

Grade

MBN

Wire Thickness

.005" - .010"

Put-Ups

Nominal Size	Part #	Wall Thickness	Wire Thickness	Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
1/16"	MBN0.06SV	0.013"	0.005"	250'	100'	Silver	0.40
7/64"	MBN0.11SV	0.013"	0.005"	250'	100'	Silver	0.80
1/8"	MBN0.13SV	0.013"	0.005"	250'	100'	Silver	1.30
5/32"	MBN0.16SV	0.013"	0.005"	250'	100'	Silver	2.10
13/64"	MBN0.20SV	0.013"	0.005"	250'	100'	Silver	2.50
1/4"	MBN0.25SV	0.013"	0.005"	250'	100'	Silver	2.20
3/8"	MBN0.38SV	0.013"	0.005"	250'	100'	Silver	3.30
1/2"	MBN0.50SV	0.013"	0.005"	100'	50'	Silver	3.50
5/8"	MBN0.63SV	0.016"	0.006"	100'	50'	Silver	3.60
25/32"	MBN0.78SV	0.013"	0.005"	100'	50'	Silver	7.35
7/8"	MBN0.88SV	0.025"	0.010"	100'	50'	Silver	10.30
1"	MBN1.00SV	0.025"	0.010"	100'	50'	Silver	13.15
1 1/8"	MBN1.13SV	0.025"	0.010"	100'	50'	Silver	13.80
1 1/4"	MBN1.25SV	0.025"	0.010"	100'	50'	Silver	16.50
1 3/8"	MBN1.38SV	0.025"	0.010"	100'	50'	Silver	16.90
1 1/2"	MBN1.50SV	0.025"	0.010"	100'	50'	Silver	18.40
2"	MBN2.00SV	0.025"	0.010"	100'	50'	Silver	22.70
2 1/4"	MBN2.25SV	0.025"	0.010"	100'	50'	Silver	23.60


Colors Available:
Silver (SV)


**Tinned Copper Sleeve For Shielding,
Grounding And Decoration.
Provides Shield Coverage
of 90% Minimum!**

Our skill with braided sleeving extends to many materials including metal braid for a variety of applications. Our tinned copper braid is perfect for shielding on harnesses and cables. Wire conforms to ASTM-B 33.

The material is also great for hose covering on hot rods and motorcycles.


(This product was previous known as Metal Braid.)

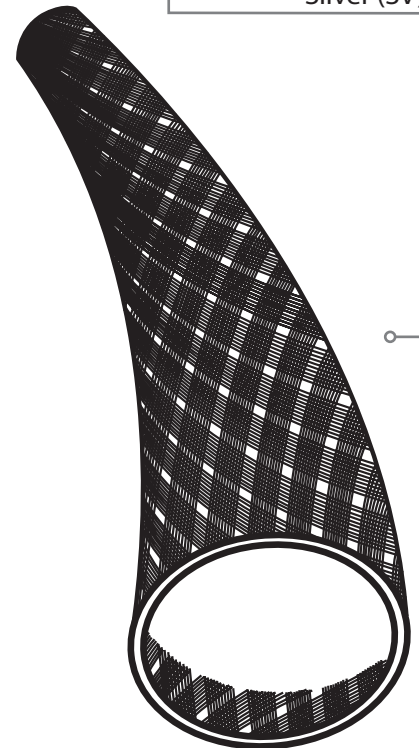

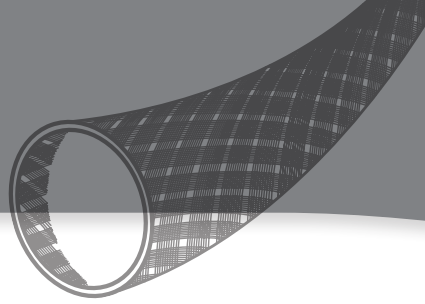

Nominal Size	Part #	Wall Thickness	Wire Thickness	Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
HEAVY DUTY CONSTRUCTION							
1/2"	MBH0.50SV	0.025"	0.010"	100'	50'	Silver	12.00
FLAT CONSTRUCTION							
1/8"	MFN0.13SV	0.013"	0.005"	250'	100'	Silver	0.70
3/16"	MFN0.19SV	0.013"	0.005"	250'	100'	Silver	1.10
1/4"	MFN0.25SV	0.013"	0.005"	250'	100'	Silver	2.00
3/8"	MFN0.38SV	0.013"	0.005"	250'	100'	Silver	2.40
5/8"	MFN0.63SV	0.013"	0.005"	100'	50'	Silver	3.60
3/4"	MFN0.75SV	0.013"	0.005"	100'	50'	Silver	7.70

Melt Point
ASTM D-2117
449°F (232°C)

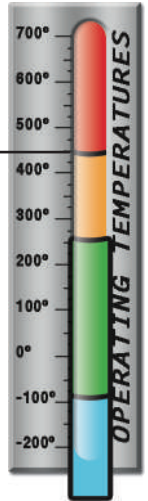

CHEMICAL RESISTANCE

- 1=No Effect
- 2=Little Effect
- 3=Affected
- 4=More Affected
- 5=Severely Affected

Aromatic Solvents	1
Aliphatic Solvents	1
Chlorinated Solvents	1
Weak Bases	1
Salts	1
Strong Bases	2
Salt Water 0-S-1926	1
Hydraulic Fluid MIL-H-5606	1
Lube Oil MIL-L-7808	1
De-Icing Fluid MIL-A-8243	1
Strong Acids	5
Strong Oxidants	5
Esters/Ketones	1
UV Light	2
Petroleum	2
Fungus ASTM G-21	2
Halogen Free	Yes
RoHS	Yes

PHYSICAL PROPERTIES

Monofilament Diameter	.005-.010
ASTM D-204	
Flammability Rating	Non Flammable
Recommended Cutting	Shears
Colors	1
Wall Thickness	.013-.025
Specific Gravity ASTM D-792	8.9
Moisture Absorption	NA
% ASTM D-570	

FLAMMABILITY

Rating Non Flammable