



- **High Temperature Resistance**
- **Easy To Install**
- **Resists Gasoline And Engine Chemicals**
- **Great Appearance**

Put-Ups

Widths	Part #	Wall Thickness	Bulk Spool 1	Bulk Spool 2	Bulk Spool 3	Bulk Spool 4	Available Colors	Lbs/100'
1"	VWN1.00BA	1/16"	100'	50'	25'	15'	Basalt	1.70
2"	VWN2.00BA	1/16"	100'	50'	25'	15'	Basalt	3.20



**Cut Cleanly
Scissors**

Material

Basalt Fiber

Grade

VWN

Wall Thickness

.0625"

Woven Volcanic Rock Tape Withstands Heat Up To 1,300°F


VOLCANO WRAP (VW) is made from continuous filament basalt fiber and is engineered for protection from temperatures 1,300°F. When wrapped around exhaust pipes, the unique construction creates attractive and durable finished product.

Volcano Wrap is 25% stronger and provides a 300°F increase in temperature protection over fiberglass wrap. The product is very rugged, and will not exhibit any vibration damage over long period of use.

The volcanic rock fiber wrap is easy to install and will provide years of protection and good looks.

Volcano Wrap helps redirect the heat every race or every day in production, keeping engine areas cooler and performance results better.

■ **Colors Available:**
Basalt (BA)

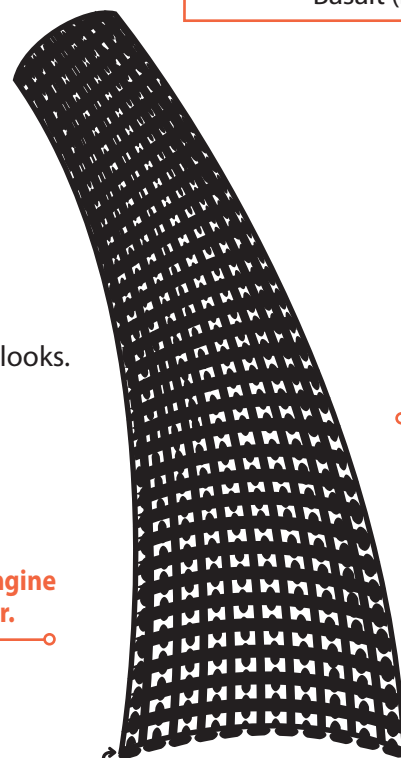

Nominal Size



CableOrganizer.fr®

10 rue du Tertre
35520 La Chapelle des Fougeretz - France
(0) 02 23 30 05 15
www.CableOrganizer.fr



ABRASION FLAMMABILITY

Abrasion Resistance
Low

Rating _____ Non Flammable

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

**Material Destroyed-
Braid Worn Through in
Both Directions**
203 Test Cycles


CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
2,642°F (1,450°C)

Maximum Continuous
Mil-I-23053
1,292°F (700°C)

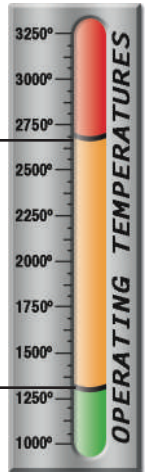

PHYSICAL PROPERTIES

Monofilament Diameter _____ NA
ASTM D-204
Flammability Rating _____ Non Flammable
Recommended Cutting _____ Scissor
Colors _____ 1
Wall Thickness _____ .0625