




- Proprietary Abrasion Fabric
- Extreme, Oversized Hook And Loop Closure
- Very Puncture and Tear Resistant
- Resistant to Water and Petroleum
- Sheds Surface Moisture

Put-Ups

Nominal Size	Part #	Wall Thickness	Hook & Loop Width	Bulk Spool	Shop Spool	Available Colors	Kgs/100m
34,9mm	DWG1.38BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	23,13
44,5mm	DWG1.75BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	25,15
50,8mm	DWG2.00BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	27,71
63,5mm	DWG2.50BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	32,14
76,2mm	DWG3.00BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	37,10
88,9mm	DWG3.50BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	39,78
101,6mm	DWG4.00BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	44,02
114,3mm	DWG4.50BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	49,78
127,8mm	DWG5.00BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	54,78
152,4mm	DWG6.00BK	1,3mm	38,1mm	22,9m	7,6m	Black BK	63,02

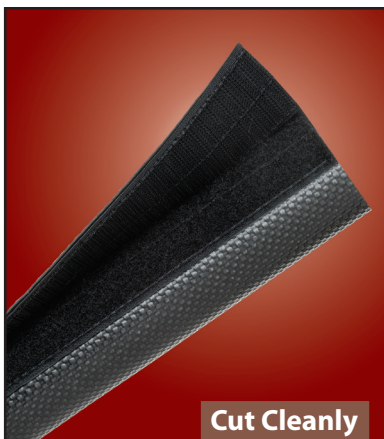


Cut Cleanly
Scissor

Heavy Duty Abrasion Sleeve With Easy On, Easy Off Hook & Loop Closure

GATORWRAP is made of proprietary extreme abrasion fabric. This protection sleeve is used for bundling and wrapping hoses and cables. The reusable sleeve features Mil-Spec extreme Hook & Loop closure which allows installation without disconnecting hoses and can reduce labor time by 70%. Gator Wrap (DWG) is an excellent choice for applications requiring protection from the toughest abrasion. This heavy duty abrasion sleeve is being used in the oil field industry on frac hoses and on drill rigs, and in the timber industry to replace spiral wrap.

Material	Proprietary Abrasion Fabric
Grade	DWG
Wall Thickness	1,3mm
Drawing Number	TF001DWG-WD

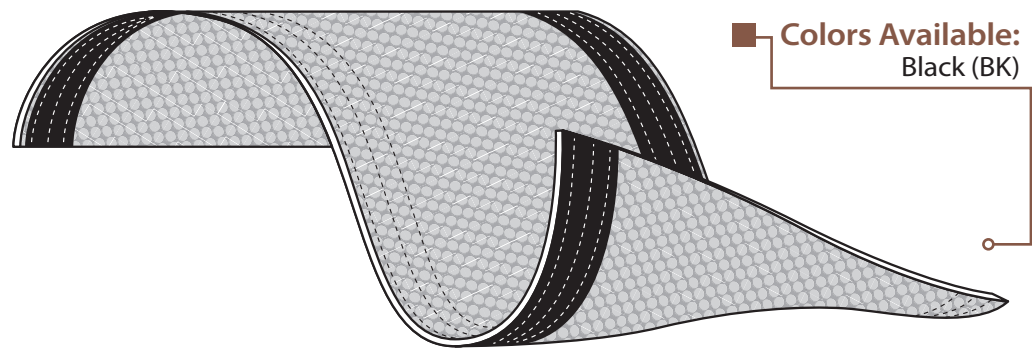

Colors Available:
Black (BK)

This is a non-expandable product. Be sure to match your application diameter accurately.

 CableOrganizer.fr®
7 boulevard de l'Odet
35740 Pacé - France
+ 33 2 23 30 05 15
www.CableOrganizer.fr





ABRASION

Abrasion Resistance
Extreme!!!

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
21°C

Humidity
50%

No Major Wear
10 000 Test Cycles

Slight Change. Coating
Worn But Still Intact.
50 000 Test Cycles

Pattern Continues. No
Significant Change.
100 000 Test Cycles

Pre-Test Weight
11 673,3 mg

Post-Test Weight
11 673,3 mg

Test End Loss Of Mass
Point Of Destruction
0 mg


CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	4
Strong Oxidants _____	4
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
RoHS _____	Yes

Maximum Continuous
Mil-I-23053
250°F (121°C)

Minimum Continuous
-60°F (-51°C)

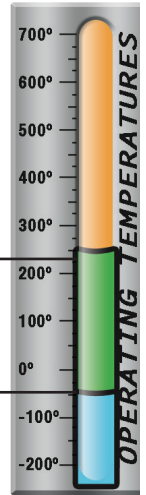

Cableorganizer.fr

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	1,3mm
Specific Gravity _____	1,3