



- Molten Splash Up to 1 204°C
- Strong Hook and Loop Closure
- Wrap Around Fire Protection

## Put Ups

Nominal Size	Part #	Wall Thickness ±0,25mm	Velcro Width	Bulk Spool	Shop Spool	Available Colors	Kgs/ 100m
25,4mm	FIW1.00RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	13,63
38,1mm	FIW1.50RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	19,31
50,8mm	FIW2.00RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	25,00
63,5mm	FIW2.50RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	30,67
76,2mm	FIW3.00RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	36,36
88,9mm	FIW3.50RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	42,04
101,6mm	FIW4.00RD	1,1mm	15,9mm	15,2m	7,6m	Red RD	47,73



Cut Cleanly  
Scissors

## Wrappable Hose Protection

FIREFLEX WRAP (FIW) protects and shields important hoses and cables from extreme heat and catastrophic flame outbreaks. It protects continuously to 260°C and will withstand a molten splash at 1 204°C.

Its unique hook and loop closure system allows for installation without the need to remove and reconnect fittings and terminations. The reusable closure additionally allows for easy repair, minimizing labor and costly downtime.

### Material


Silicone Coated Fiberglass

### Grade

FF Wrap

### Wall Thickness

1,1mm

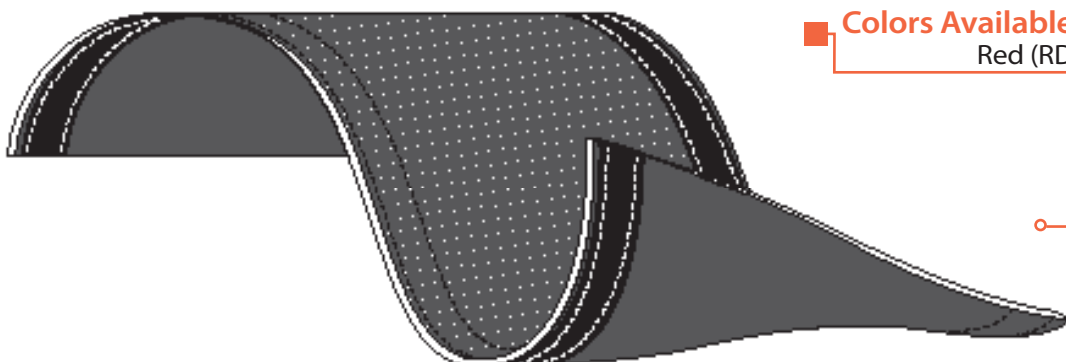

Colors Available:  
Red (RD)

Easy Installation and allows for easy repairs



7, boulevard de l'Odette  
35740 Pacé - France

+33 2 23 30 05 15

[www.CableOrganizer.fr](http://www.CableOrganizer.fr)





## ABRASION FLAMMABILITY

**Abrasion Resistance**  
**High**

Rating \_\_\_\_\_ Non Flammable

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

## CHEMICAL RESISTANCE


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	

Melt Point  
ASTM D-2117  
2 048°F (1 120°C)

Maximum Continuous  
Mil-I-23053  
500°F (260°C)

Minimum Continuous  
-65°F (-54°C)

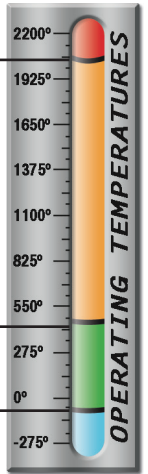

## PHYSICAL PROPERTIES

Monofilament Diameter \_\_\_\_\_ NA  
ASTM D-204

Flammability Rating \_\_\_ Non Flammable

Recommended Cutting \_\_\_\_\_ Scissor

Colors \_\_\_\_\_ 1

Wall Thickness \_\_\_\_\_ 1,1mm

Tensile Strength (Yarn) \_\_\_\_\_  
ASTM D-2256 Lbs

Specific Gravity ASTM D-792 \_\_\_\_\_ NA