

- Heavy Weight Braided Fiberglass Won't Burn, Melt, or Become Brittle
- Minimal Dusting When Cut & Handled
- Cut & Abrasion Resistant
- Easy To Install
- Resists Gasoline & Engine Chemicals



Cut Cleanly
Scissors

Material
Acrylic Coated Fiberglass

Grade
FGS

Wall Thickness
Refer to Chart

Drawing Number
TF001INS-WD


Put-Ups


Nominal Size	Part #	Maximum Diameter	Wall Thickness	Bulk Spool	Shop Spool	Available Colors	Kgs/100m
12,7mm	FGS0.50BK	22,2mm	1,3mm	61,0m	15,2m	1	10,86
19,1mm	FGS0.75BK	69,9mm	1,5mm	61,0m	15,2m	1	20,24
25,4mm	FGS1.00BK	63,5mm	1,9mm	61,0m	15,2m	1	25,30
31,8mm	FGS1.25BK	85,7mm	1,8mm	30,5m	7,6m	1	32,39
34,9mm	FGS1.38BK	111,1mm	1,8mm	30,5m	7,6m	1	35,72
38,1mm	FGS1.50BK	136,5mm	2,3mm	30,5m	7,6m	1	41,37

Heat Treated, Fray-Resistant Fiberglass Slewing

INSULTHERM (HD) Heavy Duty is a braided fiberglass sleeving made in a heavy wall construction with a high temp cord braided into the sleeving. Insultherm HD is saturated with high temperature acrylic resins which adds rigidity and reduces fray when cut. The high temperature fiberglass cord braided into the sleeving adds significant abrasion protection and allows the sleeving to expand to much larger diameters, making it easier to apply over longer lengths.

Insultherm HD is ideal heat protection for cables and hoses in a wide range of available sizes and will withstand 650°C temperatures. This sleeving is designed to provide thermal insulation and protection for EGR tubes, fuel lines, hydraulic and industrial hose applications as well as many welding and automotive applications.

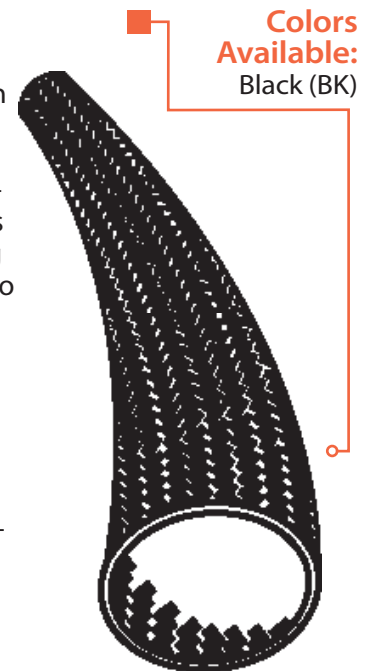

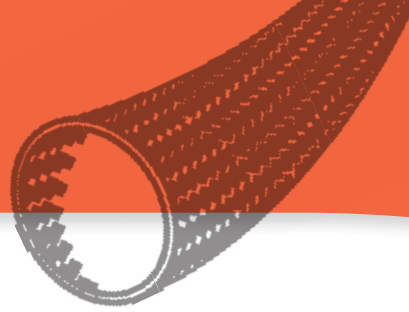

ABRASION FLAMMABILITY

Abrasion Resistance
Very High

Rating _____ UL VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

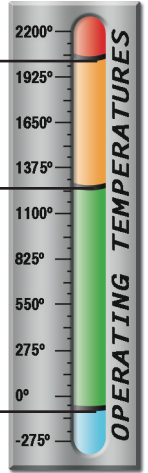

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	VW-1
FMVSS-302 Approved	
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	1,3-2,3mm
Specific Gravity ASTM D-792 _____	1,0-1,8
Moisture Absorption _____	0,01
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595	
TML _____	0,02
CVCM _____	0,01
WVR _____	0,00
Outgassing _____	Low