



- Water Repellent When Properly Sealed
- Will Not Support Growth Of Bacteria
- Disinfects Easily
- Adhesive Resists Most Cleaners And Disinfectants



Cut Cleanly
Hot Knife

Material
Laminated Polyester

Grade
L6N

Monofilament Diameter
NA

2,44m Pcs. Put-Ups

Nominal Size	Part #	Wall Thickness	Bulk Box	Box 8x8	Box 6x6	Box 4x4	Available Colors	Kgs/ 10Pcs.
9,5mm	L6N0.38	1,2mm	250	90	50	30	BK	0,82
12,7mm	L6N0.50	1,2mm	250	70	40	25	BK	0,91
19,1mm	L6N0.75	1,2mm	125	50	30	15	BK	1,64
25,4mm	L6N1.00	1,2mm	88	30	20	9	BK	2,00
31,8mm	L6N1.25	1,2mm	63	20	10	6	BK	2,36

Stylish Fluid Protection For Wires & Cables


Our new L6 Liquid Wrap semi-rigid wraparound sleeving is engineered from tough braided polyester, and laminated with a layer of strong Mylar sheeting. This combination provides a strong and lightweight solution for any application that requires protection from repeated exposure to the elements.

The wraparound construction, with 12% edge overlap makes installation easy over existing assemblies or harnesses, and the extra wide adhesive strip ensures a positive, aggressive seal against damage from exposure.

L6 is available in 2,4m pre-cut sticks in Black.

L6 is ideal for marine and automotive wiring harnesses, and also for cable management in medical applications.

- Colors Available:
Black (BK)

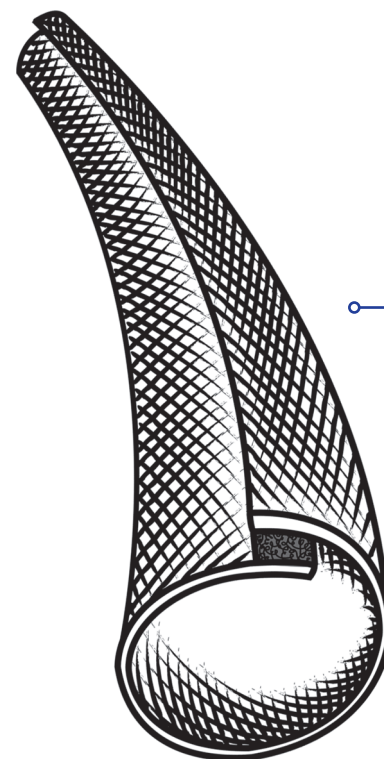

7, boulevard de l'Odé
35740 Pacé - France
+33 2 23 30 05 15

www.CableOrganizer.fr

Mylar is a registered trademark of DuPont Corporation.





ABRASION

**Abrasion Resistance
Extreme**

**Material Destroyed-
Braid Worn Through in
Both Directions
10 338 Test Cycles**

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	2
Weak Bases _____	1
Salts _____	1
Strong Bases _____	3
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

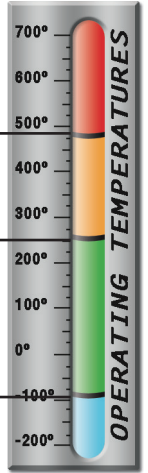

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	
FMVSS-302 Approved	
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	1,17mm
Tensile Strength (Yarn) _____	
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1,38
Moisture Absorption _____	0,1-0,2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	0,19
CVCM _____	0,00
WVR _____	0,16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	