



- Economical And Easy To Install
- Expands Up To 150%
- Conductive Mylar For Shielding Applications
- Cut And Abrasion Resistant
- Halogen Free

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Kgs/100m
		Min	Max				
6,4mm	MYN0.25	3,2mm	11,1mm	304,8m	61,0m	GL & SV	0,25
12,7mm	MYN0.50	6,4mm	25,4mm	152,4m	30,5m	GL & SV	0,52
19,1mm	MYN0.75GL	15,9mm	44,5mm	76,2m	22,9m	GL & SV	0,77

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Kgs/100m
		Min	Max				
3,2mm	MYE0.13PC	1,6mm	4,0mm	304,8m	68,6m	PC	0,12
6,4mm	MYE0.25PC	4,0mm	7,9mm	304,8m	61,0m	PC	0,15
9,5mm	MYE0.38PC	7,9mm	11,9mm	152,4m	38,1m	PC	0,16
12,7mm	MYE0.50PC	6,4mm	19,1mm	152,4m	30,5m	PC	0,63

Lightweight Economical Metallic Alternative

When your needs don't call for the durability or toughness of our CH or CX sleeving, Mylar® (MY) is an ideal, economical alternative. MY is perfect for cosmetic applications and a wide variety of installation methods create dramatic results.

Audiophile cable builders often use MY under other sleeving types to create a unique, custom visual effect. Applications that combine MY with a more robust sleeving will withstand abrasion and general use and still have the custom, "Wow!" effect cable fabricators are looking for.

Braided from thin metallic Mylar® strips along with transparent PET monofilament, MY creates a sparkling, highly reflective effect.

MY can be used instead of Mylar® sheets to wrap and bundle cables. Light weight and economy make MY an ideal product for design and tying fishing lures of all types and sizes. Several world records have been set with lures constructed with Techflex® sleeving.

Spectacular highlights and unique visual effects are achieved when Mylar is combine with other sleeving types.



Colors Available:



Silver (SV) and Gold (GL) and Pearlescent Clear (PC).

Mylar® is a registered trademark of DuPont Corporation.

■ **Colors Available:**
3 = SV, GL & PC.

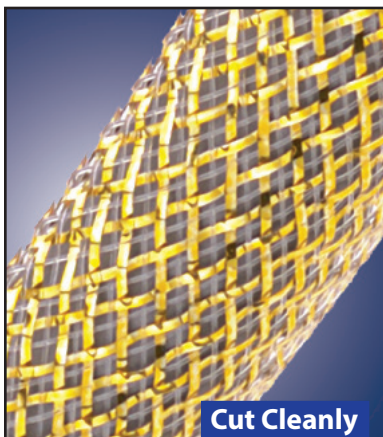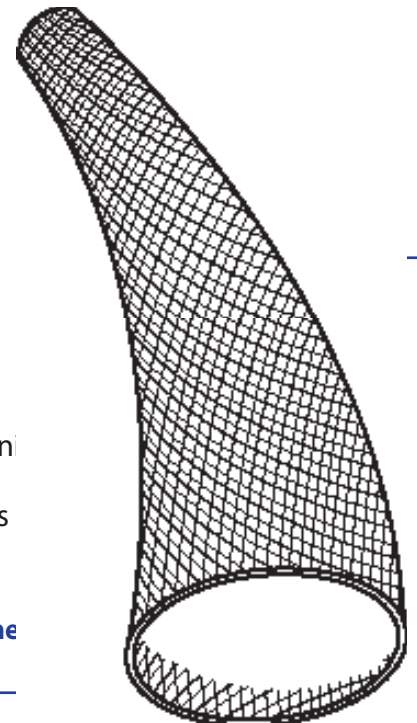

Cut Cleanly
Hot Knife

Material

PET / Mylar

Grade

MYN/MYE

Monofilament Diameter

.010"

Drawing Number


TF001MY-WD



7, boulevard de l'Odette
35740 Pacé - France
+33 2 23 30 05 15

www.CableOrganizer.fr



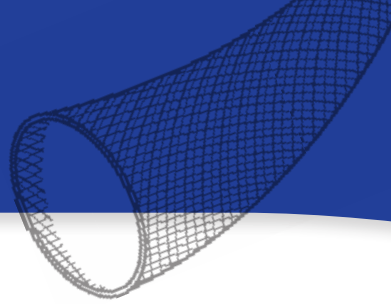

ABRASION

Abrasion Resistance
Low

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
70°F

Humidity
56%

**Many Broken Strands -
Heavy Wear To Gold
Mylar Filaments. PET
Braid Remains Intact.**
20 Test Cycles

Material Destroyed
90 Test Cycles

Pre-Test Weight
962.2 mg

Post-Test Weight
890.5 mg

Test End Loss Of Mass
Point Of Destruction
71.7 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	3
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

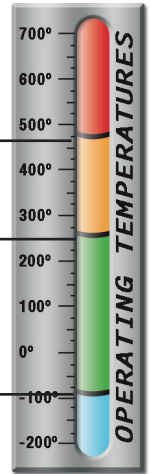

PHYSICAL PROPERTIES

Monofilament Diameter _____	0,25mm
<i>ASTM D-204</i>	
Recommended Cutting _____	Hot Knife
Colors _____	3
Wall Thickness _____	0,64mm
Specific Gravity ASTM D-792 _____	1.3
Moisture Absorption _____	.1-.2
<i>% ASTM D-570</i>	
Hard Vacuum Data _____	
<i>ASTM E-595 at 10-5 torr</i>	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Outgassing _____	Med
Oxygen Index _____	21
<i>ASTM D-2863</i>	