


- Economical And Easy To Install
- Resists Gasoline, Engine Chemicals And Cleaning Solvents
- Cut And Abrasion Resistant
- FMVSS 302 Approval

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Kgs/ 100m
		Min	Max				
9,5mm	PTM0.38	6,4mm	11,1mm	152,4m	38,1m	5	0,73
12,7mm	PTM0.50	9,5mm	15,9mm	152,4m	30,5m	5	1,10
19,1mm	PTM0.75	15,9mm	30,2mm	76,2m	22,9m	5	1,47
25,4mm	PTM1.00	22,2mm	38,1mm	76,2m	19,8m	5	1,96
31,8mm	PTM1.25	28,6mm	44,5mm	76,2m	19,8m	5	1,99
38,1mm	PTM1.50	34,9mm	60,3mm	61,0m	12,2m	5	2,50

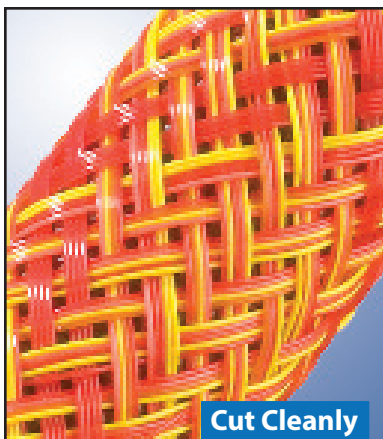

Cut Cleanly
Hot Knife

Material

Polyethylene Terephthalate

Grade

PTM

Monofilament Diameter

0,25mm

Drawing Number

TF001PTM-WD

Flexo Pet ReMix - New, Random Construction

Our innovative construction process produces a unique visual effect while providing fuller coverage and enhanced protection. The same PET monofilaments we use for FLEXO® PET grade sleeving come alive in these new color combinations. Use Denim, Fire, Camo and Desert Camo to add pizzazz to any place you use sleeving. Flexo® ReMix has a wide operating temperature range, is resistant to chemical degradation, and abrasion.

Used in electronics, automotive, marine and industrial wire harnessing applications where cost efficiency and durability are critical.

The unique braided construction and wide expandability allows quick and easy installation over large connectors and long runs.

High thermal and chemical resistance and new color combination make FLEXO® PET REMIX ideal for customizing and protecting the wires, hoses and cables.

Colors Available:
5 = DE, FI, CA, DC, JU



Colors Available:



Denim (DE), Fire(FI), Camo (CA), Desert Camo (DC), and Jungle(JU).



ABRASION FLAMMABILITY

Abrasion Resistance
High

Rating _____ UL94VO, FAR25,
FMVSS-302

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

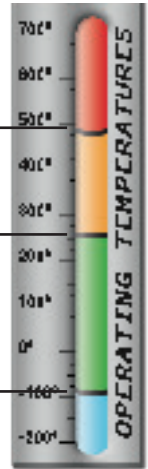

PHYSICAL PROPERTIES

Monofilament Diameter _____	0,25mm
ASTM D-204	
Flammability Rating _____	UL94
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	5
Wall Thickness _____	0,64mm
Tensile Strength (Yarn) _____	7,5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1,38
Moisture Absorption _____	0,1-0,2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	0,19
CVCM _____	0,00
WVR _____	0,16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	