



- **Rated to 250°C
Grade A**
- **Self-Extinguishing**
- **UV Resistant**
- **Halogen Free**
- **Very Flexible**
- **Watertight**
- **Resistant To
Transformer Oils**
- **Dielectric Strength
1,5 To 15kV**

FR Silicone Coated Fiberglass Grade C

FLAME RETARDANT SILICONE FLEX GLASS (SFA) sleeving is an extremely flexible braided fiberglass sleeve coated with a flame retardant elastometric silicone rubber sheath.

The unique self-fitting construction allows SFA sleeving to expand slightly for easy installation, and provides a snug fit for minimum movement and reduced internal abrasion.

SFA sleeving is rated to 250°C and it is abrasion resistant, and maintains its flexibility in low temperature environments. It is available in a very wide range of sizes, and is ideal for use in appliance assemblies, wire harnesses, transformer leads, power supplies, motor coil and heater leads.



Cut Cleanly
Scissors


Material

Silicone Coated Fiberglass

Grade

A

■ **Colors Available:**
BK=Black

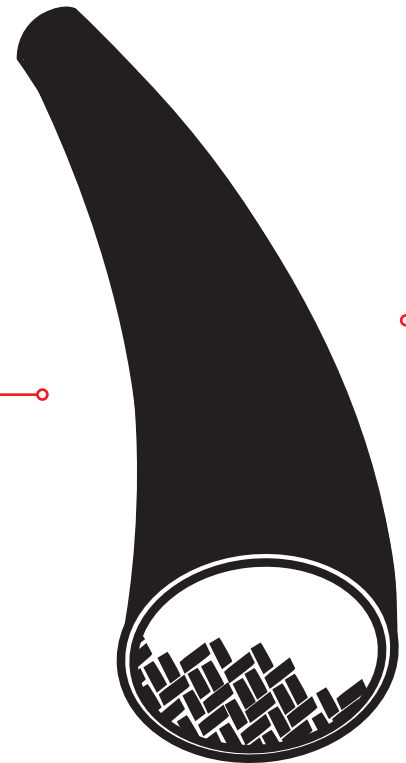

7, boulevard de l'Odéon
35740 Pacé - France

+33 2 23 30 05 15

www.CableOrganizer.fr

VW-1





Inner Diameter	Tolerance Inner Diameter (\pm)	Part#	Grade	Available Colors	Bulk Spool
0,5 mm	0,10 mm	SFA0.5MMBK	A	Black (BK)	200 m
0,8 mm	0,10 mm	SFA0.8MMBK	A	Black (BK)	200 m
1,0 mm	0,20 mm	SFA1.0MMBK	A	Black (BK)	200 m
1,5 mm	0,20 mm	SFA1.5MMBK	A	Black (BK)	200 m
2,0 mm	0,20 mm	SFA2.0MMBK	A	Black (BK)	200 m
2,5 mm	0,20 mm	SFA2.5MMBK	A	Black (BK)	200 m
3,0 mm	0,20 mm	SFA3.0MMBK	A	Black (BK)	200 m
3,5 mm	0,20 mm	SFA3.5MMBK	A	Black (BK)	200 m
4,0 mm	0,25 mm	SFA4.0MMBK	A	Black (BK)	200 m
5,0 mm	0,25 mm	SFA5.0MMBK	A	Black (BK)	100 m
6,0 mm	0,25 mm	SFA6.0MMBK	A	Black (BK)	100 m
7,0 mm	0,25 mm	SFA7.0MMBK	A	Black (BK)	100 m
8,0 mm	0,25 mm	SFA8.0MMBK	A	Black (BK)	100 m
9,0 mm	0,50 mm	SFA9.0MMBK	A	Black (BK)	100 m
10 mm	0,50 mm	SFA10MMBK	A	Black (BK)	100 m
12 mm	0,50 mm	SFA12MMBK	A	Black (BK)	100 m
14 mm	0,50 mm	SFA14MMBK	A	Black (BK)	50 m
16 mm	1,00 mm	SFA16MMBK	A	Black (BK)	50 m
18 mm	1,00 mm	SFA18MMBK	A	Black (BK)	50 m
20 mm	1,00 mm	SFA20MMBK	A	Black (BK)	50 m
22 mm	1,00 mm	SFA22MMBK	A	Black (BK)	30 m
25 mm	1,00 mm	SFA25MMBK	A	Black (BK)	30 m
30 mm	1,00 mm	SFA30MMBK	A	Black (BK)	30 m
35 mm	1,00 mm	SFA35MMBK	A	Black (BK)	30 m
40 mm	1,00 mm	SFA40MMBK	A	Black (BK)	30 m
45 mm	1,00 mm	SFA45MMBK	A	Black (BK)	30 m

CHEMICAL RESISTANCE

Resistant to oils, acids, alkalies, organic solvents and aliphatic hydrocarbons.

OPERATING TEMPERATURE RANGE

Continuous working temperature; -60°C to 250°C, peaks at + 290°C (few hours)