



ABRASION/MECHANICAL

# Expando® 686DM


## Product Highlights

- Operating temperature from -70°C to +200°C (-94°F to +392°F)
- Outstanding abrasion protection
- VW-1 acc. to UL 1441
- FAR Part 25
- Halogen-free
- Low toxicity, smoke generation and offgassing
- Does not trap heat or humidity
- Rot-free
- Expandable design accommodates a variety of sizes



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

EXP686DM\_10272009

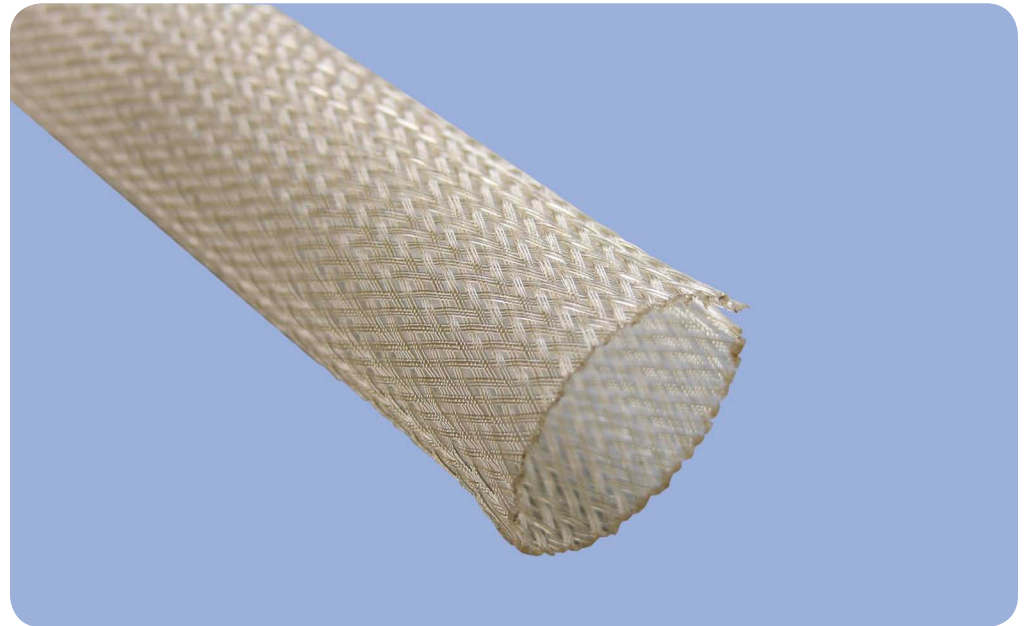

**Expando® 686DM** is an expandable oversleeve designed for mechanical protection in temperature extremes and hostile environmental conditions. Rated to +200°C (+392°F), Expando 686DM meets VW-1 and FAR Part 25 flammability requirements.

Featuring a dual monofilament construction, Expando 686DM blends larger PEEK (polyetheretherketone) guard strands with PPS (polyphenylene sulfide) support strands. The inherent properties of the raw materials give Expando 686DM low levels of flammability, toxicity, smoke generation and hard vacuum offgassing.

Expando 686DM is widely used in the aerospace industry for its outstanding properties in extreme environments. This product should be considered for aircraft, space, military, marine, and hostile-environment applications.

Expando® products are tough, lightweight oversleeves used to protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The braided construction of Expando products enables each size to expand to fit several application shapes and diameters. This open textile construction also makes them highly flexible and resistant to trapping water, heat and humidity.

**BentleyHarris®**  
Protection Products

**FEDERAL MOGUL**  
Systems Protection

 **CableOrganizer.fr®**

7 boulevard de l'Odet  
35740 Pacé - France  
+ 33 2 23 30 05 15

[www.cableorganizer.fr](http://www.cableorganizer.fr)

# Performance Data – Expando® 686DM

Property	Test Method	Result
Operating Temperature Range		-70°C to +200°C (-94°F to +392°F)
Low Temperature Flexibility	MIL-DTL-23053E	-70°C
Flammability	UL 1441 FAR Part 25	VW-1 Pass
Smoke Density	ASTM E-662	D <sub>mc</sub> = 2.3
Oxygen Index	ASTM D-2863	36.5%
Hard Vacuum TML CVCVM	ASTM E-595	Meets industry limits: 1.0% max 0.1% max
Fluid Resistance Jet Fuel JP-4 (MIL-T-5624) Hydraulic Fluid (MIL-H-5606) Lube Oil (MIL-I-7808) De-Ice Fluid (MIL-A-8243) Reference Oil #2 (ASTM D-471) Salt Water (O-S-1926)	MIL-DTL-23053	No visible degradation

## Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve

Commercial Part Number	Recommended Application Range mm (in)		Maximum Weight g/m (lb/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
Expando 686DM 3-X	2 (3/32")	6 (1/4")	2.3 (0.0015)	610 (2,000')
Expando 686DM 6-X	3 (1/8")	13 (1/2")	4.9 (0.0033)	305 (1,000')
Expando 686DM 10-X	5 (3/16")	19 (3/4")	10.2 (0.0068)	152 (500')
Expando 686DM 13-X	6 (1/4")	22 (7/8")	13.1 (0.0088)	152 (500')
Expando 686DM 19-X	13 (1/2")	35 (1-3/8")	19.7 (0.0132)	152 (500')
Expando 686DM 32-X	25 (1")	45 (1-3/4")	26.2 (0.0176)	76 (250')
Expando 686DM 45-X	19 (3/4")	57 (2-1/4")	29.5 (0.0198)	76 (250')
Expando 686DM 51-X	38 (1-1/2")	57 (2-1/4")	49.1 (0.0330)	76 (250')
Expando 686DM 64-X	48 (1-7/8")	76 (3")	55.7 (0.0374)	76 (250')

X= Color Code: 0=Black 9=Natural

## Part Numbering System

Example	Product Name	Size	Color	Quantity
	Expando 686DM	13	0 (black)	152 m (500 ft)



End view (enlarged diameter) of Expando® 686DM showing PEEK guard strands (larger) and PPS support strands (smaller, gray) in a typical configuration.



7 boulevard de l'Odéon  
35740 Pacé - France  
+ 33 2 23 30 05 1

[www.cableorganizer.fr](http://www.cableorganizer.fr)

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.