



- Economical And Easy To Install
- Expands Up To 150%
- Conductive Mylar For Shielding Applications
- Cut And Abrasion Resistant
- Halogen Free

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min	Max				
1/4"	MYN0.25	1/8"	7/16"	1,000'	200'	GL & SV	0.17
1/2"	MYN0.50	1/4"	1"	500'	100'	GL & SV	0.35
3/4"	MYN0.75GL	5/8"	1 3/4"	250'	75'	GL & SV	0.52

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min	Max				
1/8"	MYE0.13PC	1/16"	5/32"	1,000'	225'	PC	0.08
1/4"	MYE0.25PC	5/32"	5/16"	1,000'	200'	PC	0.10
3/8"	MYE0.38PC	5/16"	15/32"	500'	125'	PC	0.11
1/2"	MYE0.50PC	1/4"	3/4"	500'	100'	PC	0.42

Lightweight Economical Metallic Alternative

When your needs don't call for the durability or toughness of our CH or CX sleeving, Mylar (MY) is an ideal, economical alternative. MY is perfect for cosmetic applications and a wide variety of installation methods create dramatic results.



Audiophile cable builders often use MY under other sleeving types to create a unique, custom visual effect. Applications that combine MY with a more robust sleeving will withstand abrasion and general use and still have the custom, "Wow!" effect cable fabricators are looking for.

Braided from thin metallic Mylar strips along with transparent PET monofilament, MY creates a sparkling, highly reflective effect.

MY can be used instead of Mylar sheets to wrap and bundle cables. Light weight and economy make MY an ideal product for designing and tying fishing lures of all types and sizes. Several world records have been set with lures constructed with Techflex sleeving.

Spectacular highlights and unique visual effects are achieved when Mylar is combined with other sleeving types.

- Colors Available:
3 = SV, GL & PC.

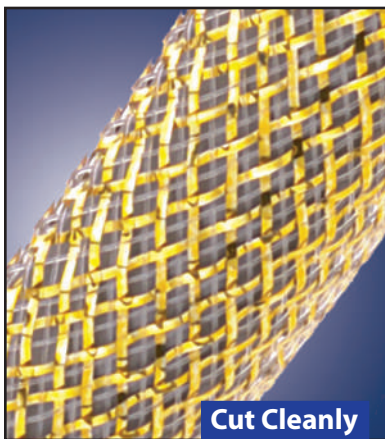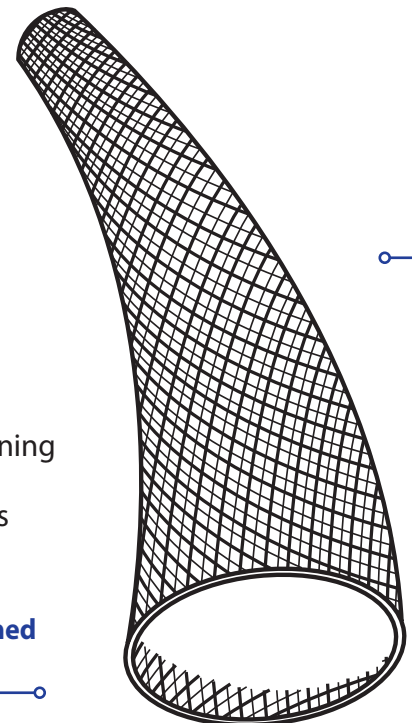

Cut Cleanly
Hot Knife


Material
PET / Mylar

Grade
MYN/MYE

Monofilament Diameter
.010"


Drawing Number
TF001MY-WD

Colors Available:



Silver (SV) and Gold (GL) and Pearlescent Clear (PC).

Mylar® is a registered trademark of DuPont Corporation.

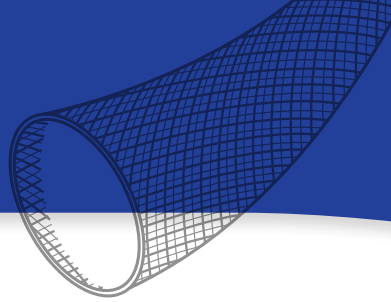

ABRASION

Abrasion Resistance
Very Low

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
70°F

Humidity
56%

Many Broken Strands - Heavy Wear To Gold Mylar Filaments. PET Braid Remains Intact.
20 Test Cycles

Material Destroyed
90 Test Cycles

Pre-Test Weight
962.2 mg

Post-Test Weight
890.5 mg

Test End Loss Of Mass Point Of Destruction
71.7 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	3
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

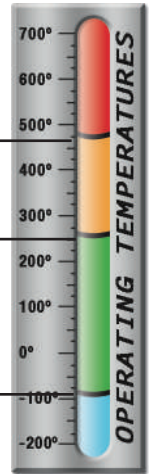

PHYSICAL PROPERTIES

Monofilament Diameter _____	.010
ASTM D-204	
Recommended Cutting _____	Hot Knife
Colors _____	3
Wall Thickness _____	.025
Specific Gravity ASTM D-792 _____	1.3
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	