


- Economical And Easy To Install
- Dual-Colored Monofilament
- Even more color possibilities

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
		Min	Max				
1/4"	PTD0.25	1/8"	7/16"	1,000'	200'	2	0.30
3/8"	PTD0.38	3/16"	1/2"	500'	125'	2	0.57
1/2"	PTD0.50	1/4"	3/4"	500'	100'	2	0.77
5/8"	PTD0.63	3/8"	1"	500'	100'	2	0.95
3/4"	PTD0.75	1/2"	1 1/4"	250'	75'	2	1.20
1"	PTD1.00	5/8"	1 5/8"	250'	65'	2	1.34
1 1/4"	PTD1.25	3/4"	1 3/4"	250'	50'	2	1.60
1 1/2"	PTD1.50	1"	2 1/8"	200'	40'	2	1.96
1 3/4"	PTD1.75	1 1/4"	2 3/4"	200'	30'	2	2.45

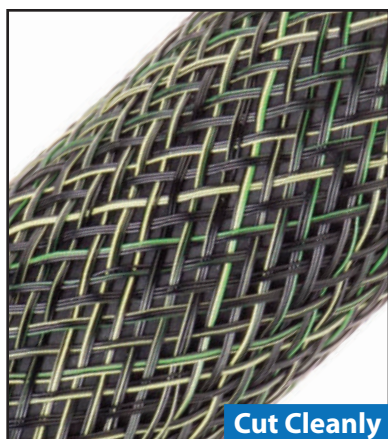

**Cut Cleanly
Hot Knife**

Material

Polyethylene Terephthalate

Grade

PTD

Monofilament Diameter


.010

Flexo PrisMix - Braided Camo

Prismix (PTD) utilizes a cutting-edge dual-colored monofilament to produce never before possible color combinations.



This new technology creates an incredible random camouflage in our exclusive new Mix series of products. Be sure to utilize Prismix on your next adventure for the best braided camo you have ever seen!

Colors Available:



Expedition Mix (EM) and Trail Mix (TM)

Colors Available:
2 = EM & TM

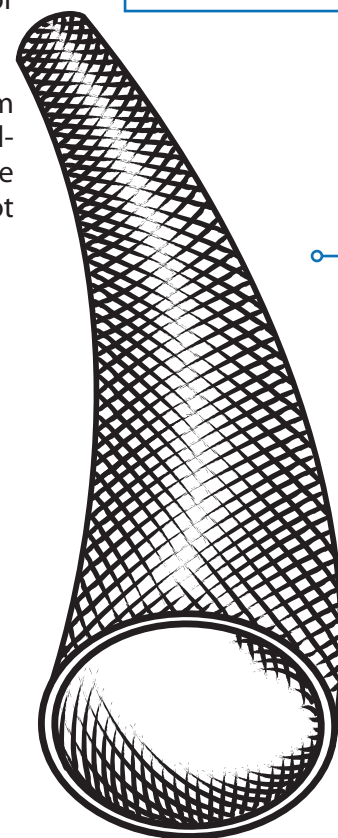

CableOrganizer.fr®

10 rue du Tertre
35520 La Chapelle des Fougeretz - France
(0) 02 23 30 05 15
www.CableOrganizer.fr

ABYC
Setting Standards for Safer Boating

FAR-25



ABRASION **FLAMMABILITY**

Abrasion Resistance
Medium

Rating _____ UL94

Abrasion Test Machine
Taber 5150

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

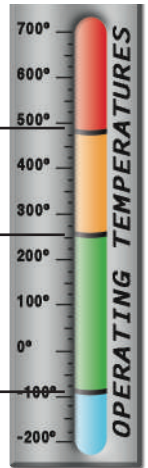

PHYSICAL PROPERTIES

Monofilament Diameter _____	.010
ASTM D-204	
Flammability Rating _____	UL94
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	2
Wall Thickness _____	.025
Tensile Strength (Yarn) _____	7.5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1 - .2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Medium
Oxygen Index _____	21
ASTM D-2863	